



SmartTouch®
Controller



Autoswing
on Rotex Pro
only



- Perfect heat & pressure distribution
- Single swing plate 40x50 cm (16x20")
- Version One : manual opening and swing
- Version Lite : automatic opening and manual swing
- Version Pro : automatic opening and swing
- User friendly
- Complete clearance of the plate
- Reversible C-shaped part & Quick Release
- Robust frame
- Suitable for laser transfer applications & sublimation on textile and rigid materials and pretreatment
- Ideal for small to medium productions
- Manufactured in France
- 2-year guarantee on the machine
- 10-year guarantee on heating elements



Set programs



QuickRelease®
system



3200W
(Pro only)



Pre-heat time




Electromagnetic
(Lite & Pro only)


OPTIONAL ACCESSORIES



Support table




DTG plate




Set of 4 plates




Laser pointer



Teflon Sheet



Nomex® cover (included)



Shoe plate



Lower heating plate

Email

sales@sefa.fr
support@sefa.fr
www.sefa.fr



Phone

Office : + 33 4 68 74 05 89
Fax : + 33 4 68 74 24 08




Address

SEFA SAS
Z.I. PASTABRAC
11 260 ESPERAZA (FR)

TECHNICAL CHARACTERISTICS

Type	Electromagnetic (Rotex Lite & Pro) Manual (Rotex One)
Operation	Swing - Rotating plate Autoswing on Rotex Pro
Platen size	40x50 cm / 16x20"
Max thickness	17 mm
Weight	81 Kg / 179 lb
Pressure	590 g/cm ²
°C / °F Max	220 °C / 429 °F
Power	2500 W (One & Lite) 3200 W (Pro)
Power supply	240 V Single-phase
Amperage	11 A (One & Lite) 14 A (Pro)
Applications	Direct to Garment, Flex, Textile Sublimation, Laser Transfer, Screen Printing
Dimensions	759x909x569 mm 30x36x22"

SETTINGS

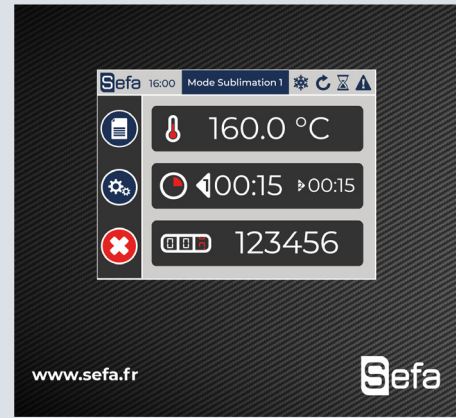

New SmartTouch® controller developed by Sefa

Recipes menu with adaptive regulation parameters depending on the job: flex, sublimation on textile, sublimation on rigid substrates, DTG...

Advanced electronics

- Fully editable recipes menus
- Independent time for each plate
- Multi timer (up to 2 different times)
- Cycles counters
- Stop cycle function
- ECO GREEN mode

From 0 to 600 s (precision +/- 1%).
From 15 to 220°C (precision +/- 1%).
Heating time to reach 180°C : 10 min.




180° reversible
C-shaped lower
part with Quick
Release system


OPTIONAL ACCESSORIES



TAB-98 LITE
Support table




PLA-DRY M
Sponge plate to dry
pretreated clothes.



PLA-SET
Set of 4 plates
12 x 8 cm, 15 x 15 cm,
12 x 45 cm, 25 x 30 cm.




CROI-161
Laser system to place your
transfers with more pre-
cision (1 extra laser can be
added).



PLA-SHOES-CV
Special plate that fits textile
and sport shoes (side and
back).




ACC-CHAUD-INF
Lower 40 x 50 cm hea-
ting plate that fits all SEFA
presses (individual electro-
nic box included).



KIT-IND-RL
Height indicator (can't be
added separately).

DIMENSIONS

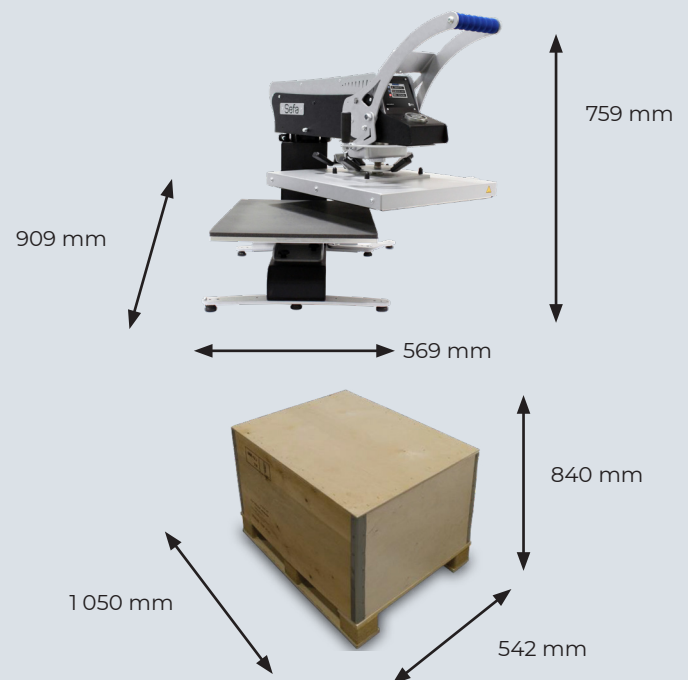

Box weight CAI-100 : 25 kg